






Polypropylene Felt (P)

- Multi-layered construction passes filtrate through a series of filtration layers to deliver high efficiency and maximise bag life
- Support, pre-filtration and microfibre media are internally sewn together to prevent bypass and provide strength
- Glazed finish on all Premier bags reduces fibre migration



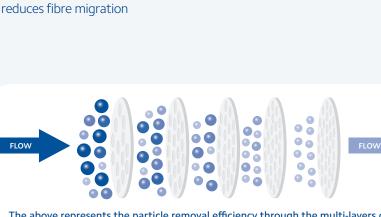

The above represents the particle removal efficiency through the multi-layers of the Premier polypropylene felt media The Premier bag has an efficiency rating of 93%.

\$

Specification


Neck Material

Polypropylene


Max. Operating Temperature 95°C

Max. Operating Pressure Differential

FDA Compliant Media Manufactured from silicone-free materials



Water at 20°C. 25 µm Polypropylene felt.

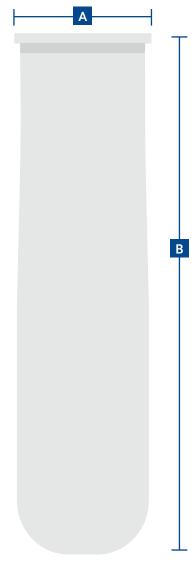

Bag Size	A (mm)	B (mm)	Area (m²)
1	178	406	0.23
2	178	813	0.41

Part Number

Code	Media	Micron	Size
РВ	Polypropylene (P)	0.5, 1, 5, 10, 25	1, 2